




E&E LIGHTING
AUSTRALIA

PRODUCT CODE: 220SBDIFF DIFFUSED BATTEN

PRODUCT INFORMATION

PRODUCT CODE	DESCRIPTION
220SBDIFF	20W LED 600mm Diffused Batten
MWSRFT	MWS Module to suit 220SBDIFF

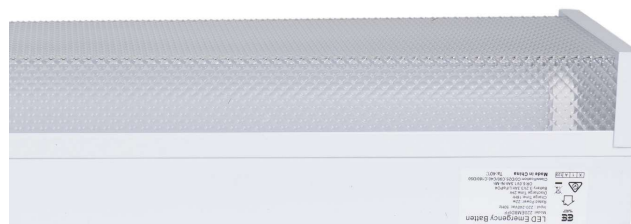

ORDERING INFORMATION

Carton Qty	4 pieces
Weight	1.8kg (unit) - 7.2kg (box)
Dimension (L x W x H)	620mm x 125mm x 91mm

OPERATIONAL INFORMATION

TECHNICAL SPECIFICATIONS	
Operating Voltage	220-260V; 50Hz
Operating Temperature	-25° - 45° C
IP Rating	IP20
Wiring	Large Terminal Block
Mounting Type	Surface Mount
Construction	Powder Coated Metal Body and Prismatic Diffuser
Standards	AS/NZS 60598.1 EMC

LEDS	
Power Consumption	20W
Power Factor	>0.95
Lens	LED Lamp Rated at 50,000 Hours
Lumens Output	2000lm
Colour Temperature	5000k
Beam Angle	110 Degrees

REPLACEMENT PART

PART NUMBER	DESCRIPTION
DIFF2	600mm Prismatic Diffuser

The product details outlined in this document are accurate as of the document's version date. We reserve the right to modify product design, specifications, or materials without prior notice due to ongoing product improvement policy and changes to industry standards. We recommend confirming the applicable specifications at the time of placing your order to ensure alignment with the most current information.

Version: 0325-02



0487 248 481



www.eelighting.com.au



sales@eelighting.com.au